



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

HL 030914
PCT/13 04/51236

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03102268.4

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

REC'D 23 JUL 2004

WIPO

PCT

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03102268.4
Demande no:

Anmeldetag:
Date of filing: 23.07.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Shaving apparatus

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

B26B19/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Shaving apparatus

The invention relates to a shaving apparatus according to the introductory portion of claim 1.

5 Such a shaving apparatus is known from European patent application 0 406 974. When the trimmer of this apparatus is activated, the cutters of the shaving heads remain coupled to the drive structure. This entails a number of drawbacks.

10 Firstly, a substantial portion of the available motor power is consumed by driving the cutters of the shaving heads. This power consumption limits the power available for driving the trimmer. In turn, this limits the frequency with which cutting members of the trimmer can be oscillated at a given amount of available motor power. Such a limitation is undesirable, because trimmers tend to operate more effectively when moving at higher frequencies. Secondly, the power consumed for driving the cutters of the shaving heads while only the trimmer is used, constitutes a waste of energy. This is particularly disadvantageous if
15 the shaver is battery driven, because of the relatively limited amount of energy that can be stored in a battery. Thirdly, the idly moving cutters of the shaving heads cause noise and wear.

20 In German patent application 2 028 063, a shaving apparatus is described in which the transmission structure includes a clutch between the motor and the cutter of the shaving head. The clutch and a connecting arm for transferring oscillating movements from a drive shaft to the trimmer are arranged and connected to an operating member, such that the clutch disengages when the connecting arm engages the drive shaft. The clutch may for instance be a plate clutch or a claw clutch or a coupling member, which engages either a pin projecting from the cutters of the shaving head or a pin projecting from the trimmer. Plate
25 and claw clutches are relatively complicated and the coupling member is guided during its reciprocating movement by the operating member, which causes drag and wear.

It is an object of the present invention to provide a shaving apparatus of the above-described type in which the problem of drag and noise due to idly moving cutters of the shaving head is solved in a simple manner.

According to the present invention, this object is achieved by providing a
5 shaving apparatus according to claim 1. By reversing the sense of rotation of a portion of the drive structure, which is coupled to the cutter or cutters of the shaving head or shaving heads via a unidirectional coupling, the unidirectional clutch either engages, causing the cutter or cutters of the shaving head or shaving heads to be entrained, or disengages, causing the cutter or cutters of the shaving head or shaving heads not to be driven. In the latter condition the
10 trimmer can be driven without driving the cutter or cutters of the shaving head or shaving heads.

Particular embodiments of the invention are set forth in the dependent claims. Further aspects, effects and details of the invention are described with reference to examples shown in the drawings.

15

Fig. 1 is a perspective view of an example of a shaving apparatus according to the invention,

Fig. 2 is a side view, partially in cross-section of an example of a drive
20 structure of a shaving apparatus according to the invention;

Fig. 3 is a schematical representation in side view of a trimmer of a shaving apparatus according to the invention;

Fig. 4a is a schematic partial side view of an example of a unidirectional clutch of the shaving apparatus according to Figs. 1-3 in engaged condition;

25 Fig. 4b is a schematic partial side view of the clutch of Fig. 4a in disengaged operational condition;

Fig. 5a is schematically representation of an electric circuit for reversal of the sense of rotation of the motor of the shown shaving apparatus; and

30 Fig. 5b shows the circuit shown in Fig. 5a in a condition for causing the motor to rotate in a sense of rotation opposite to that of Fig. 5a.

The shaving apparatus 1 according to the example shown in Figure 1 has a shaving head carrier 2 carrying three shaving heads 3 and a trimmer 7 for trimming hairs of for instance side-whiskers, a beard or a moustache.

The shaving heads 3 are each provided with an external hair-cutting member 4 with hair-entry apertures 5 and an internal hair-cutting member including a plurality of cutters 6. As is best seen in Figure 3, the trimmer 7 has an operating member 8 constructed as a sliding button, a holder 9 and a connection element 10 connecting the holder 9 with the sliding button 8. The holder 9 is provided with a fixed hair-trimming member 11 having a row of cutting teeth and a movable hair-trimming member 12 also having a row of cutting teeth. The movable hair-trimming member 12 is movable back and forth relative to the fixed hair-trimming member 11 in the direction of the rows of teeth. The connection element 10 is hinged to the holder 9 at a connection 13. The holder 9 is hinged to the housing at a connection 14. These hinge connections enable the holder 9 to be pivoted in the directions B (Figure 3), between an operating position projecting from the housing and a retracted position extending along the housing, by sliding the operating member 8 in the directions A. When the holder 9 is in an operating position projecting from the housing, an arm 15 of a drive structure inside the housing of the apparatus 1 is coupled to the movable hair-trimmer member 12. In operation, the movable hair-trimmer member 12 is driven by an end 41 of the arm 15, which moves back and forth in the direction of movement of the movable hair-trimmer member 12 (substantially perpendicular to the cross-sectional view of Figure 3). When the holder 9 is in its non-operational, retracted position, the movable hair-trimmer member 12 is disengaged from the end 41 of the arm 15. When the motor 16 is rotating, the end 41 of the arm 15 is still moving back and forth, but the movable hair-trimmer member 12 is not driven because it is disengaged from the drive structure.

In Figure 2, the drive structure of the apparatus according to Fig. 1 is shown. The drive structure includes a motor 16 and a transmission structure 17. The trimmer 7 is coupled to a drive shaft 18 of the motor 16 by means of an excentric 20, an arm 19 and the arm 15, the arms 15, 19 being fixedly connected by a shaft 31 that is suspended for rotation about its center line. The shaft 31 is integrally formed with the arm 19. In operation, the excentric 20 causes the arm 19 to pivot about the centerline of the shaft 31. This pivoting movement is transferred to the arm 15 causing its end 41 to move back and forth.

Furthermore, a driven portion of a unidirectional clutch 22 is coupled to the drive shaft 18 to be rotated by the drive shaft 18. A gear wheel 21 is fixed to the driving portion of the unidirectional clutch 22 to be rotated by the driven portion of the unidirectional

clutch 22. The gear wheel 21 is connected to stub gear wheels 23, which, fixed to stub axes 24 for driving stubs 25 that engage recesses of the internal hair-cutting members 6 of the shaving heads 3.

5 In Figures 4a and 4b, the unidirectional clutch 22 is shown in more detail. The unidirectional clutch 22 is of a known type and includes an inner ring 26 connected to the drive shaft 18 and an outer ring 27 connected to the gear wheel 21. Balls 28 are arranged in compartments 29 between the rings 26, 27. When the drive shaft 18 and the inner ring 26 are rotating in the sense of rotation indicated in Figure 4a by the arrow C, due to the shape of the compartments 29, the balls 28 are clamped between the inner ring 26 and the outer ring 27.
10 This clamping effect causes the outer ring 27 of the clutch 22 to be entrained by the inner ring 26, so that the cutters 6 of the shaving heads are driven.

When the drive shaft 18 and the inner ring 26 are rotating in the opposite sense of rotation, indicated in Figure 4b by the arrow D, due to the shape of the compartments 29, the balls 28 are not clamped between the inner ring 26 and the outer ring 27, but can rotate
15 with only very little friction relative to the inner and outer rings 26, 27. Therefore, if the inner ring 26 is driven in this opposite sense of rotation, the outer ring 27 of the clutch 22 is not entrained, so that the clutch operates in freewheeling mode and neither the cutters 6 of the shaving heads 3 nor the gear wheels 21, 23 and the stub shafts 24 are driven.

It is remarked that instead of the above-described clutch 22 many different
20 types of unidirectional clutches may be used in a shaving apparatus according to the invention.

It is now referred in particular to Figs. 5a and 5b where reversing means for reversing the sense of rotation of the motor 16 are shown. A power source 30 can be connected to the motor 16 via electrical conductors 32-36. In broken lines, the operating
25 member 8 of the trimmer 7 is shown. The conductors 36 are mounted to the operating member 8, such that, when the operating member 8 moves, the conductors 36 move with it.

When the operating member 8 is in the position shown in Figure 5a, a first pole of the power source 30 is connected via the conductors 32, 36 and 34 to a first electrical contact of the motor 16, while the other, second pole of the power source 30 is connected via
30 the conductors 33, 36 and 35 to the other, second electrical contact of the motor 16.

By sliding the operating member 8 in the direction indicated by arrow E in Figure 5a, the operating member 8 is brought in the position shown in Fig. 5b. In this position of the operating member, the first pole of the power source 30 is connected via the conductors 32, 36 and 35 to the second electrical contact of the motor 16, while the other,

second pole of the power source 30 is connected via the conductors 33, 36 and 34 to the first electrical contact of the motor 16. By sliding the operating member 8 in the direction indicated by arrow F in Fig. 5b, the operating member 8 is slid into the position shown in Fig. 5a. The directions E and F indicated in Figs. 5a and 5b correspond to the directions A

5 indicated in Fig. 3. Thus the reversing means for reversing the sense of rotation of the motor 16 are integrated in the operating member 8 for putting the trimmer into and out of operation.

In operation, during shaving without the use of the trimmer, the shaving heads 3 are in operation, while the trimmer 7 is in its retracted position. In this operating condition, the drive shaft 18 rotates in the sense of rotation causing the unidirectional clutch 22 to be in
10 coupled condition (Fig. 4a). Although the end 41 of the arm 15 moves back and forth due to the connections via the shaft 31, the arm 19 and the excentric 20, the trimmer is not in operation since the end 41 of the drive structure does not engage the movable hair-trimming member 12. The operating member is then in the position shown in Fig. 5a.

If the operating member 8 is moved in a direction A (Fig. 3), E (Fig. 5a)
15 towards the shaving head, the trimmer 7 is moved into its operating position and engaged by the drive structure, so that the movable hair-trimming member 12 is driven. At the same time, the motor 16 is reversed, because the operating member 8 is slid to the position shown in Fig. 5b. The reversal of the sense of rotation of the motor 16 causes the unidirectional clutch 22 not to entrain its driving portion, so that the cutters 6 of the shaving heads 3 are not driven.

20 Thus, inversion of the sense of rotation of the driven part of the unidirectional clutch 22 causes the cutters 6 of the shaving heads 3 not to be driven. This constructionally simple measure allows to avoid drag, wear and noise while the movable hair-trimming member 12 of the trimmer 7 is in operation. During operation of the trimmer 7 the shaving heads 3 do not consume power from the motor 16 so that full power is available for the
25 trimmer 7. This allows the hair-trimming member 12 of the trimmer 7 to operate at a higher frequency at a given power of the motor. Preferably, the number of cycles per unit of time at which of the movable hair-trimming member 12 is oscillating is also higher than the number of revolutions per unit of time at which cutter 6 rotates when in operation.

Since the reversal of the sense of rotation is operated in conjunction with
30 putting the trimmer 7 into and out of operation, the reversal of the sense of rotation does not need to be operated separately, but is automatically obtained when the trimmer is put into and out of operation.

Since the reversing means include switching circuitry for reversing the sense of operation of the motor 16, the sense of operation in which the unidirectional clutch 22 is

driven can be inverted in a very simple manner. However, other solutions for inverting the sense of rotation in which the unidirectional clutch 22 is driven, such a reversing gear, are also conceivable.

In the shown example, the portion 15, 18, 19, 41, 31 of the transmission structure 17 for driving the trimmer 7 branches off from a portion 18, 21, 23, 24, 25 of the transmission structure 17 for driving the cutters at the drive shaft 18 that is directly coupled to the motor 16. Branching off the trimmer drive from the cutter drive at a portion of the drive structure directly coupled to the motor allows to drive the trimmer 7 without losses in the gearing between the motor and the cutter or cutters of the shaving head or heads.

In practical use of the apparatus 1, the unidirectional clutch 22 will not be particularly susceptible to wear and tear, since the clutch 22 will act most of the time in its coupled mode.

Having described the invention, many modifications thereto will become apparent to those skilled within the art without deviation from the invention as defined by the scope of the appended claims. In particular the invention is not limited to shavers with rotating shaving heads only, but can also be applied in shavers with oscillating shaving heads driven by a drive structure of which in operation at least one member rotates.

CLAIMS:

1. A shaving apparatus comprising:
at least one shaving head (3) including at least one cutter (6);
a trimmer (7); and
a drive structure including a motor (16) and a transmission structure (17) for
5 driving the at least one cutter (6) and the trimmer (7);
the trimmer (7) being disengageable from the drive structure;
characterized by reversing means (32-36) for reversing between a first sense of
rotation and a second, opposite, sense of rotation of at least a portion of the drive structure;
and
10 a unidirectional clutch (22) between at least said portion of the drive structure
of which the sense of rotation is reversible and the at least one cutter (6).
2. A shaving apparatus according to claim 1, wherein the reversing means (32-
36) are co-operative with the trimmer (7) for reversing said sense of rotation in response to
15 putting said trimmer (7) into and out of operation.
3. A shaving apparatus according to claim 1 or 2, wherein the reversing means
(32-36) include switching circuitry for reversing the sense of operation of said motor (16).
- 20 4. A shaving apparatus according to any one of the preceding claims, wherein the
drive structure has transmission ratios for driving the trimmer (7) with a number of cycles per
unit of time and for driving the at least one cutter (6) of the at least one shaving head (3) with
a number of revolutions per unit of time, such that said number of cycles per unit of time of
the driven trimmer (7) is higher than said number of revolutions per unit of time of the at
25 least one driven cutter (6).
5. A shaving apparatus according to any one of the preceding claims, wherein a
portion of the transmission structure (17) for driving the trimmer (7) branches off from a

portion of the transmission structure (17) for driving said at least one cutter (6) at a shaft coupled to be directly driven by the motor (16).

ABSTRACT:

A shaving apparatus at least one shaving head (3) with at least one cutter (6), a trimmer (7), and a drive structure including a motor (16) for driving the cutter or cutters (6) and the trimmer (7). The trimmer (7) is disengageable from the drive structure. Reversing means (32-36) for reversing between a first sense of rotation and a second, opposite, sense of rotation of at least a portion of the drive structure are provided. A unidirectional clutch (22) is arranged between the portion of the drive structure of which the sense of rotation is reversible and the cutter or cutters (6). If the sense of rotation is reversed from the sense of rotation in which the cutter or cutters (6) is driven, the trimmer (7) may be driven without driving the cutter or cutters (6).

10

Fig.2

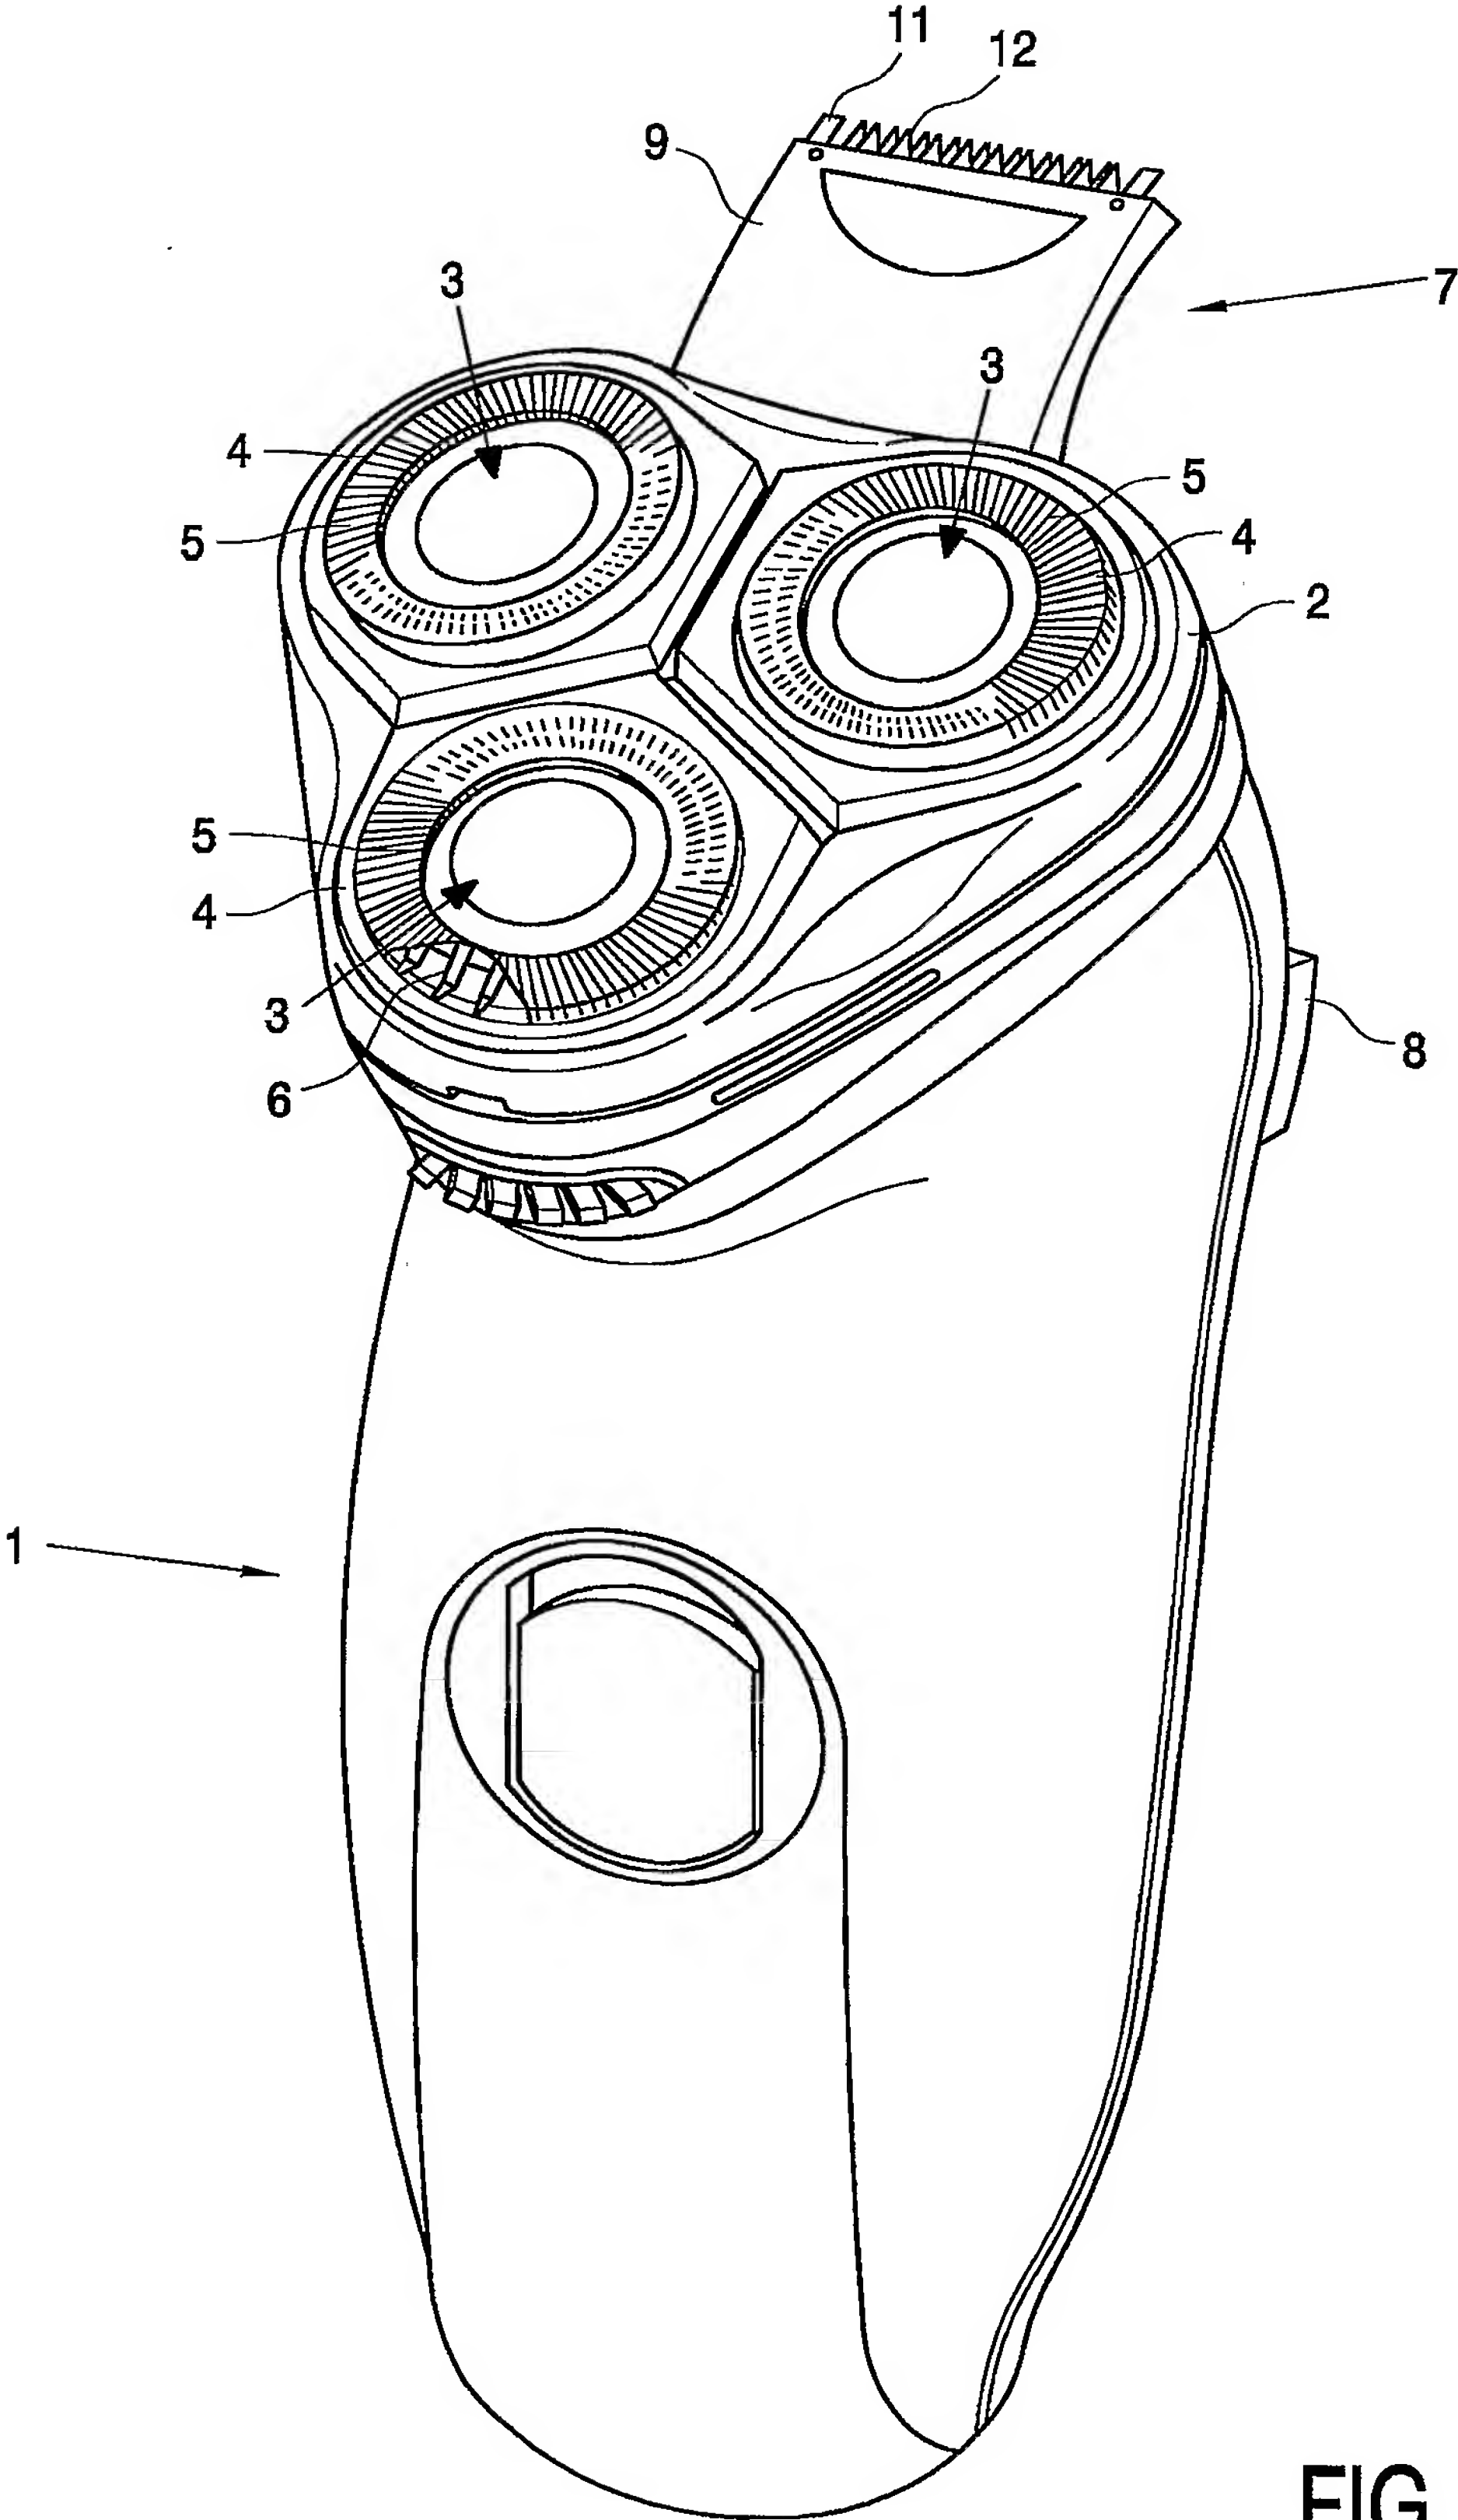


FIG. 1

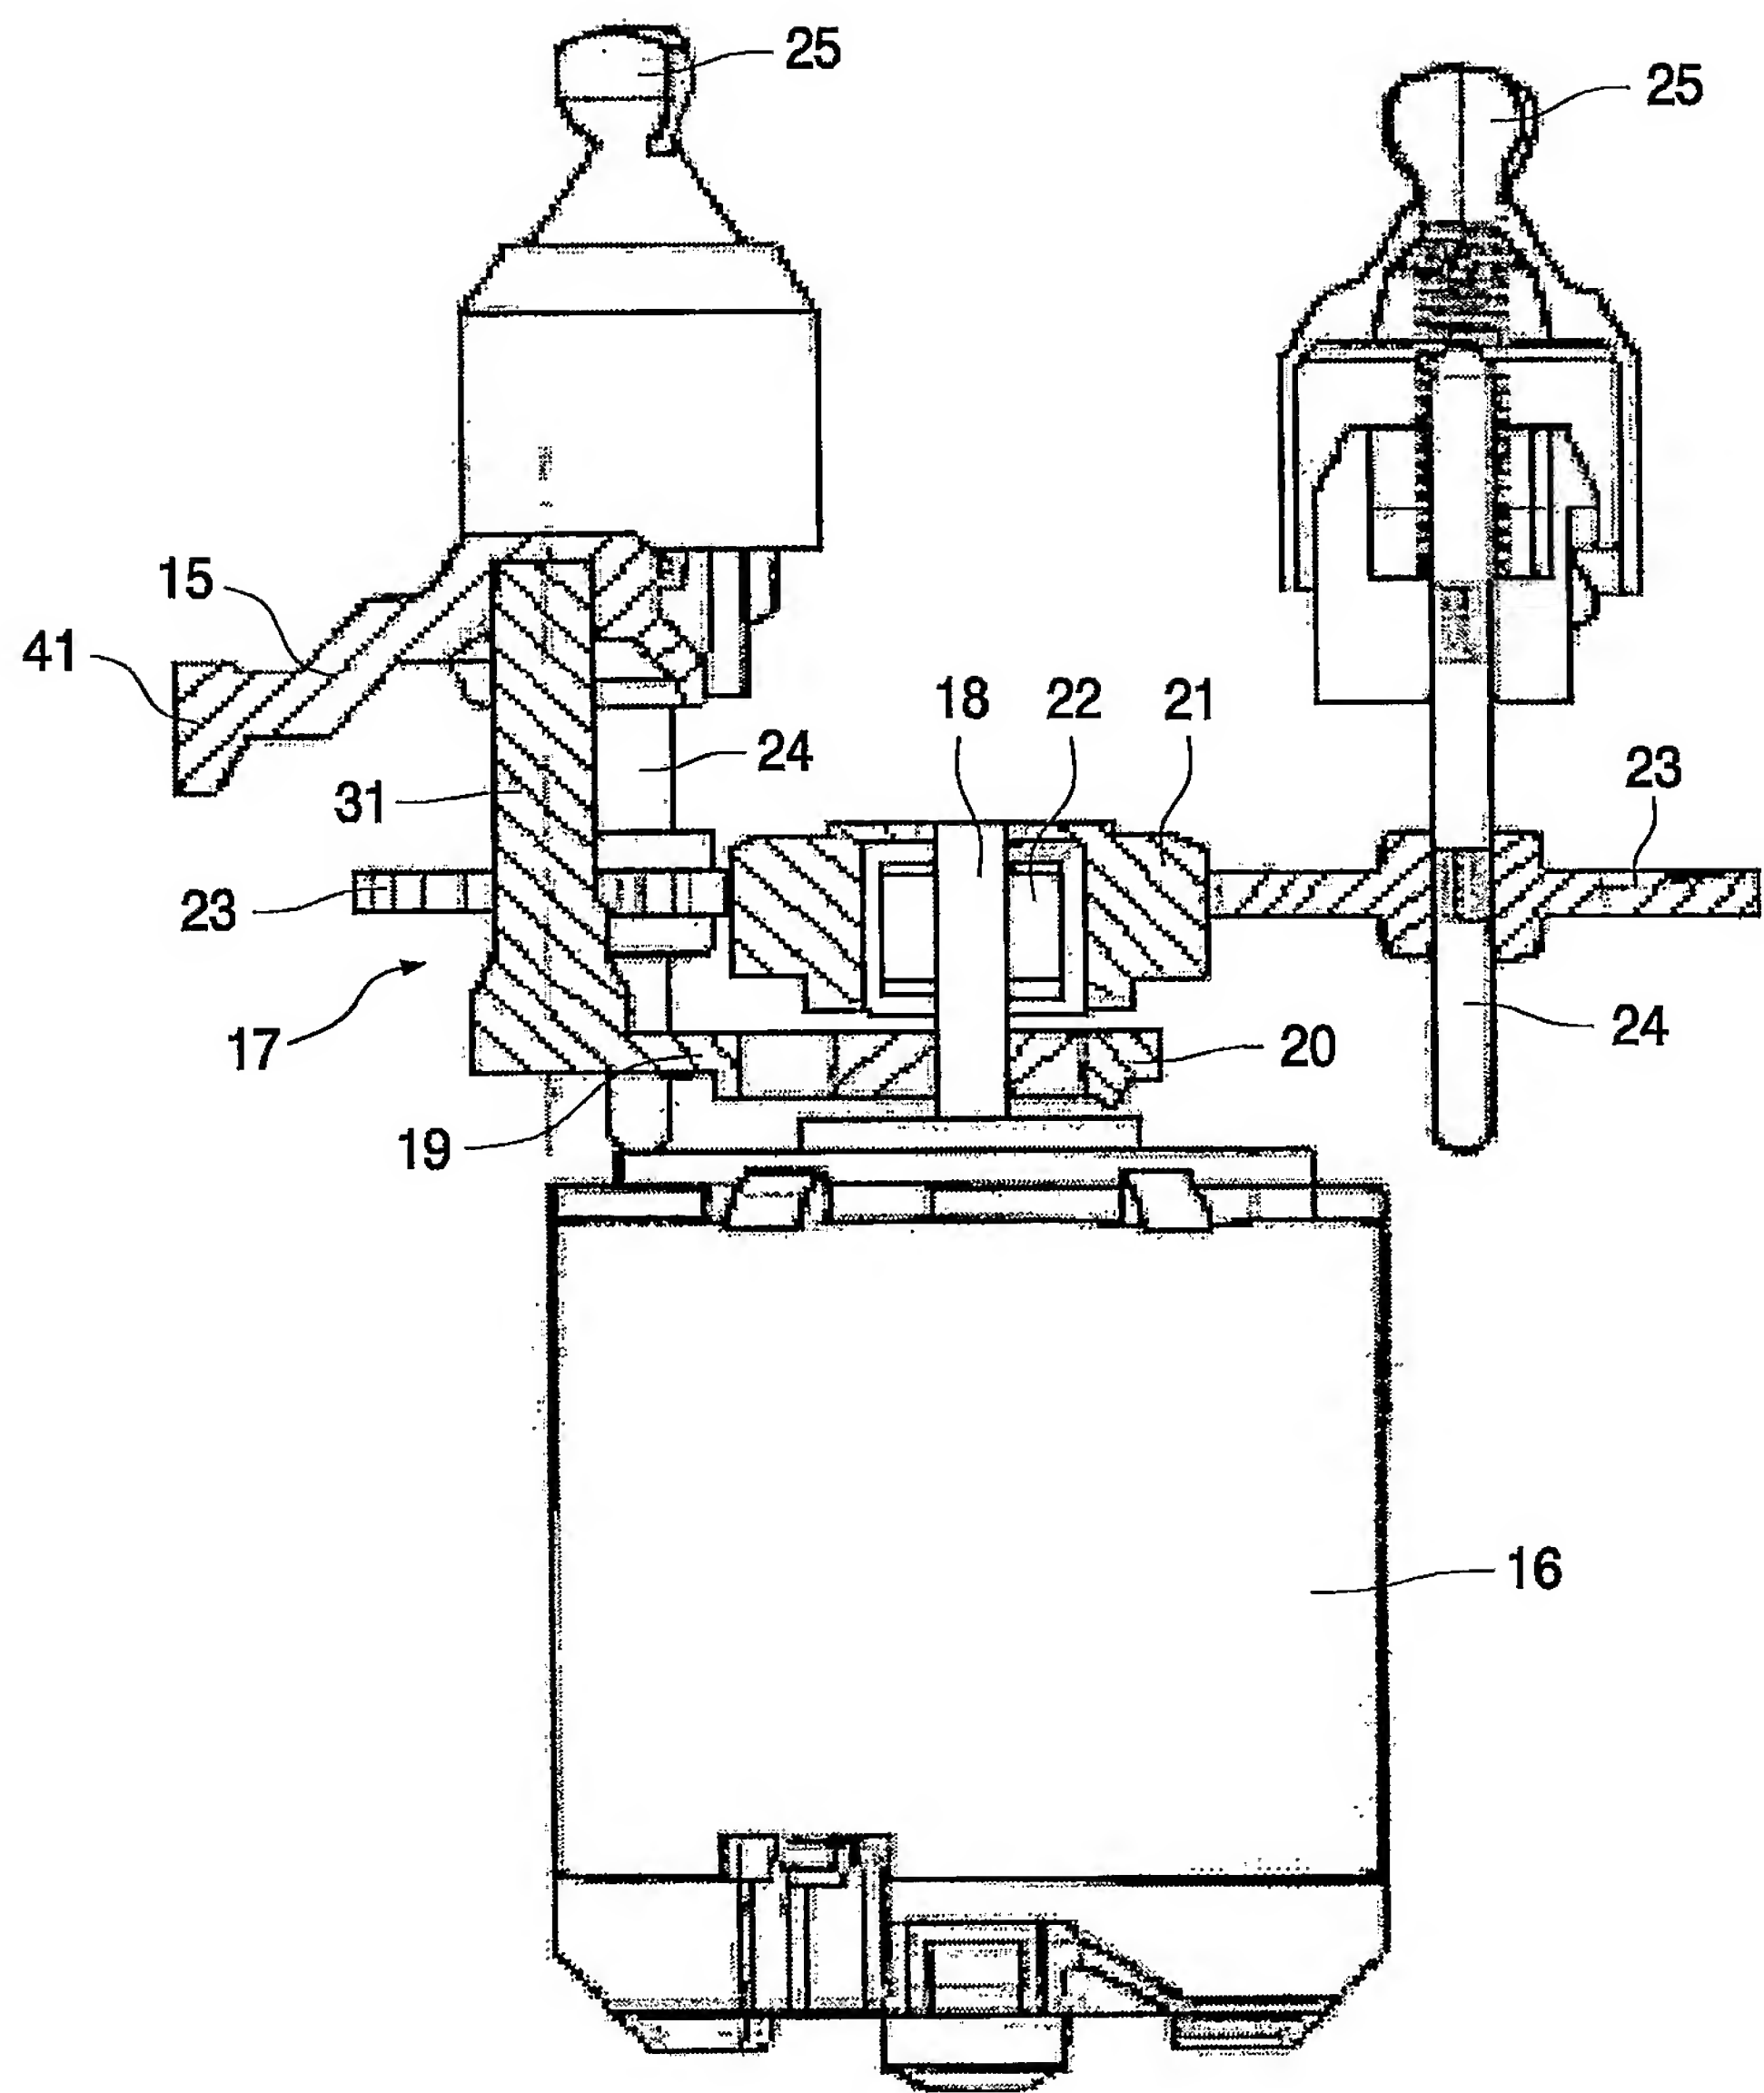


FIG. 2

3/5

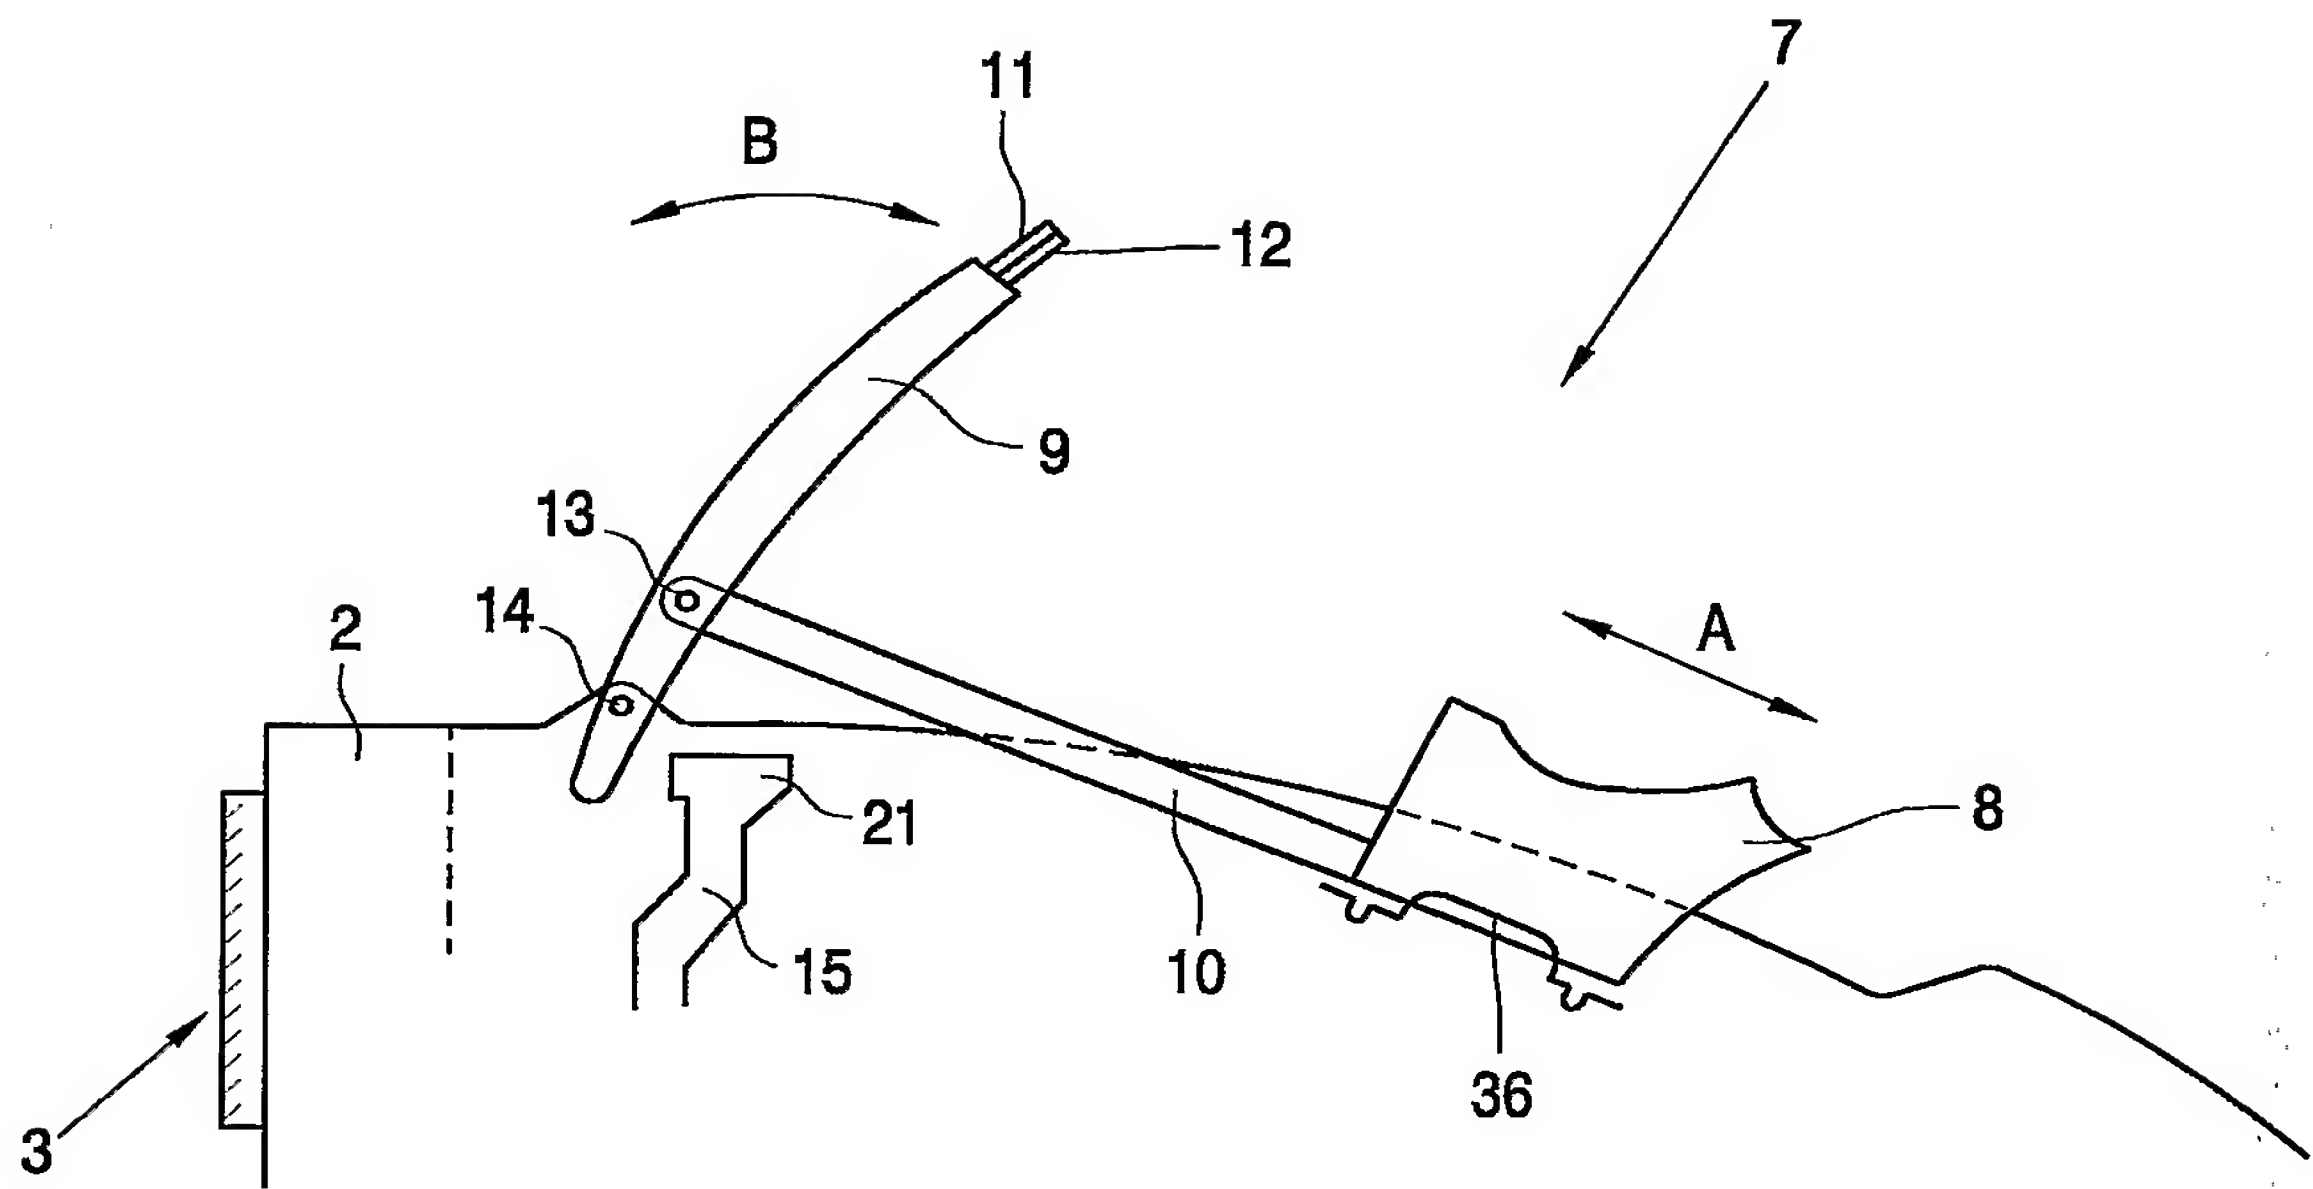


FIG. 3

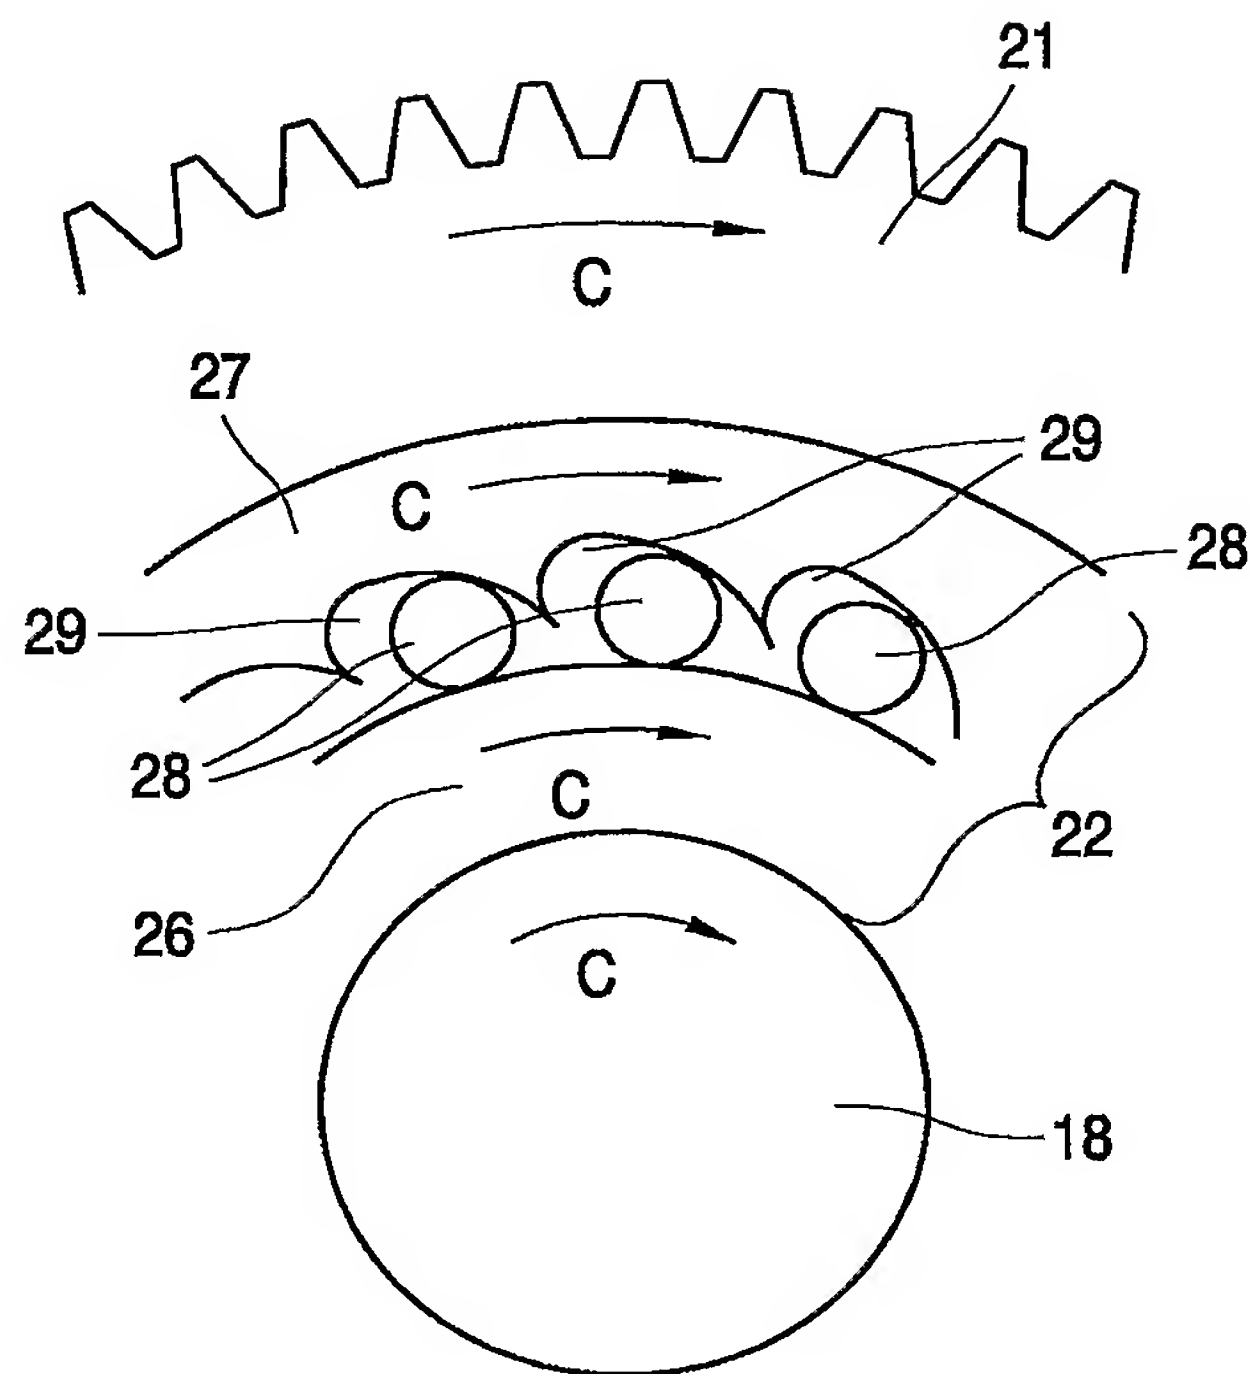


FIG. 4a

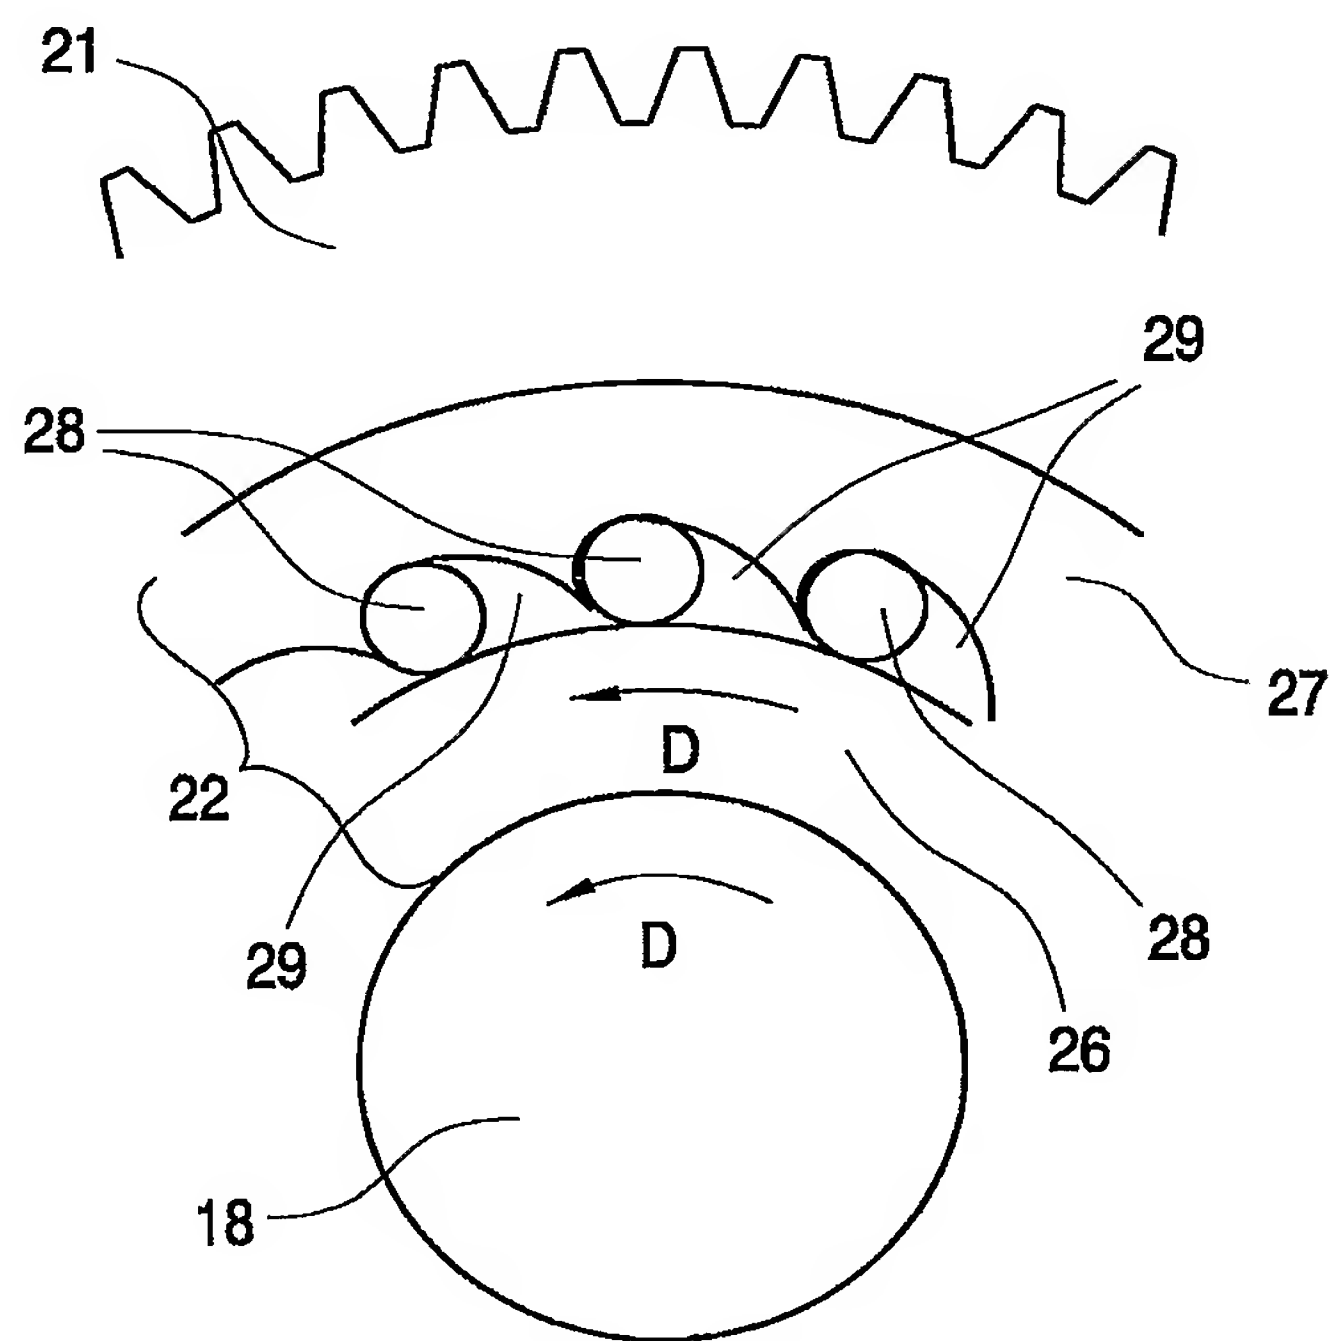


FIG. 4b

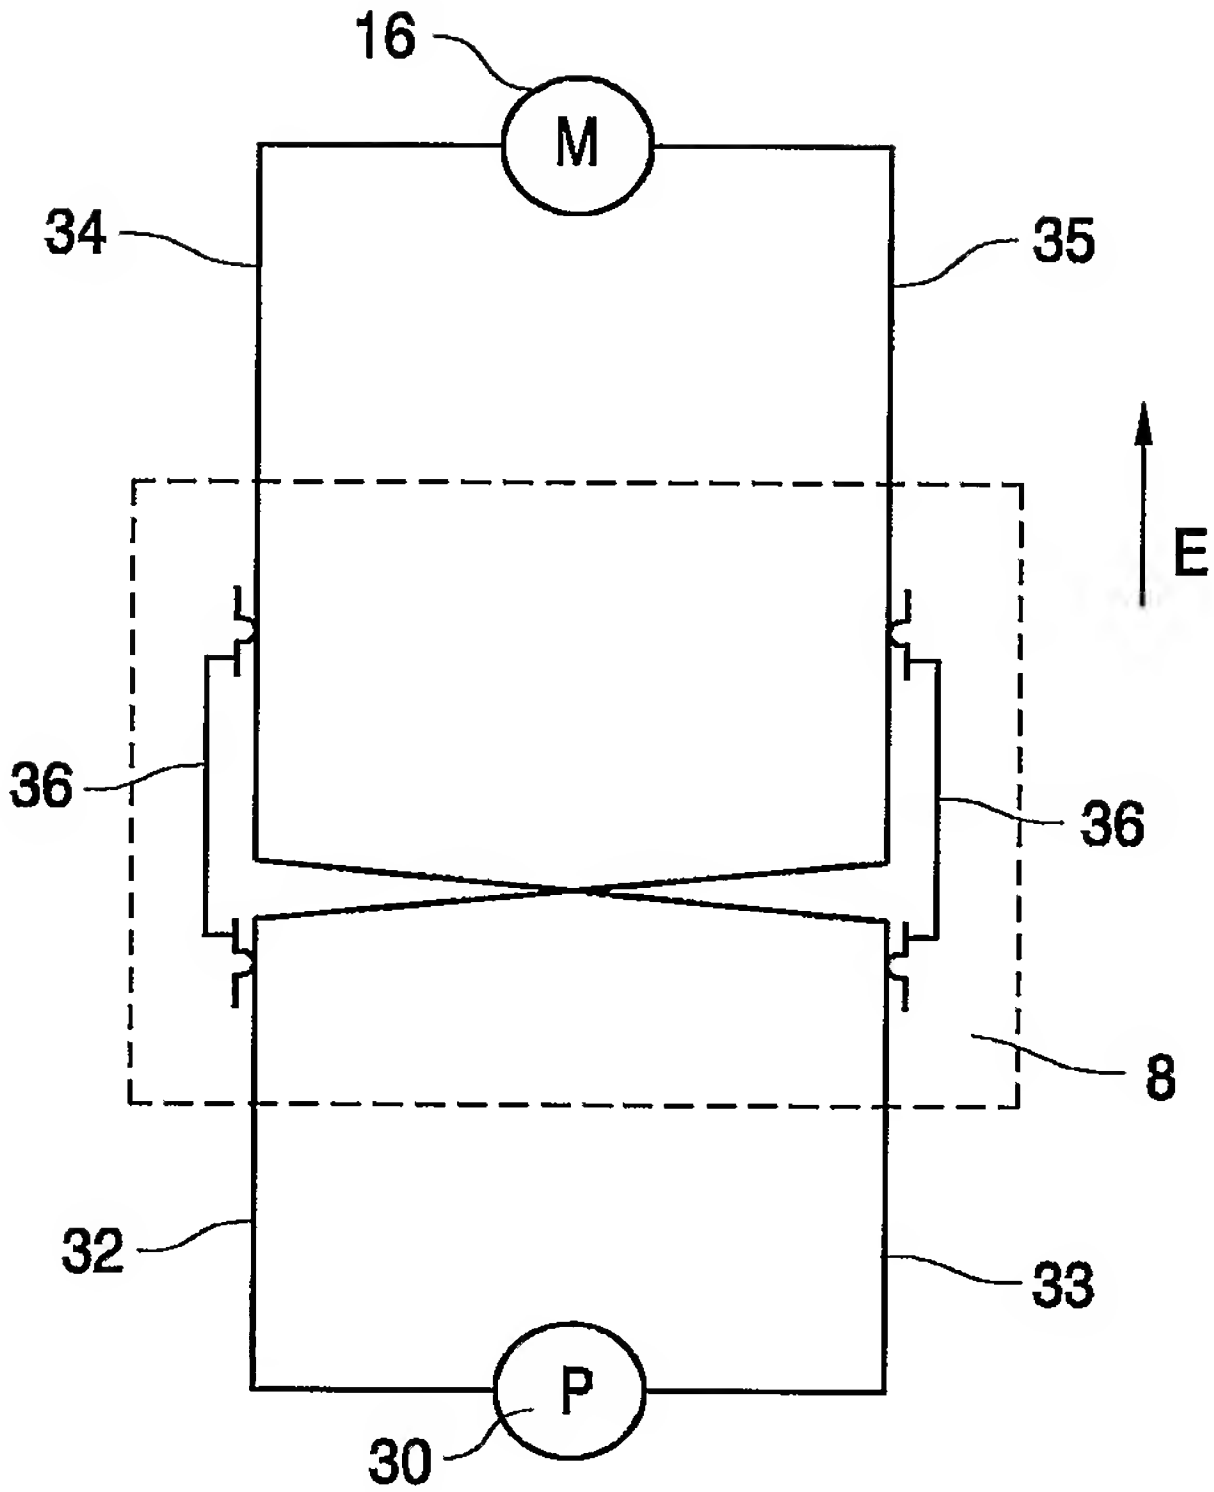


FIG. 5a

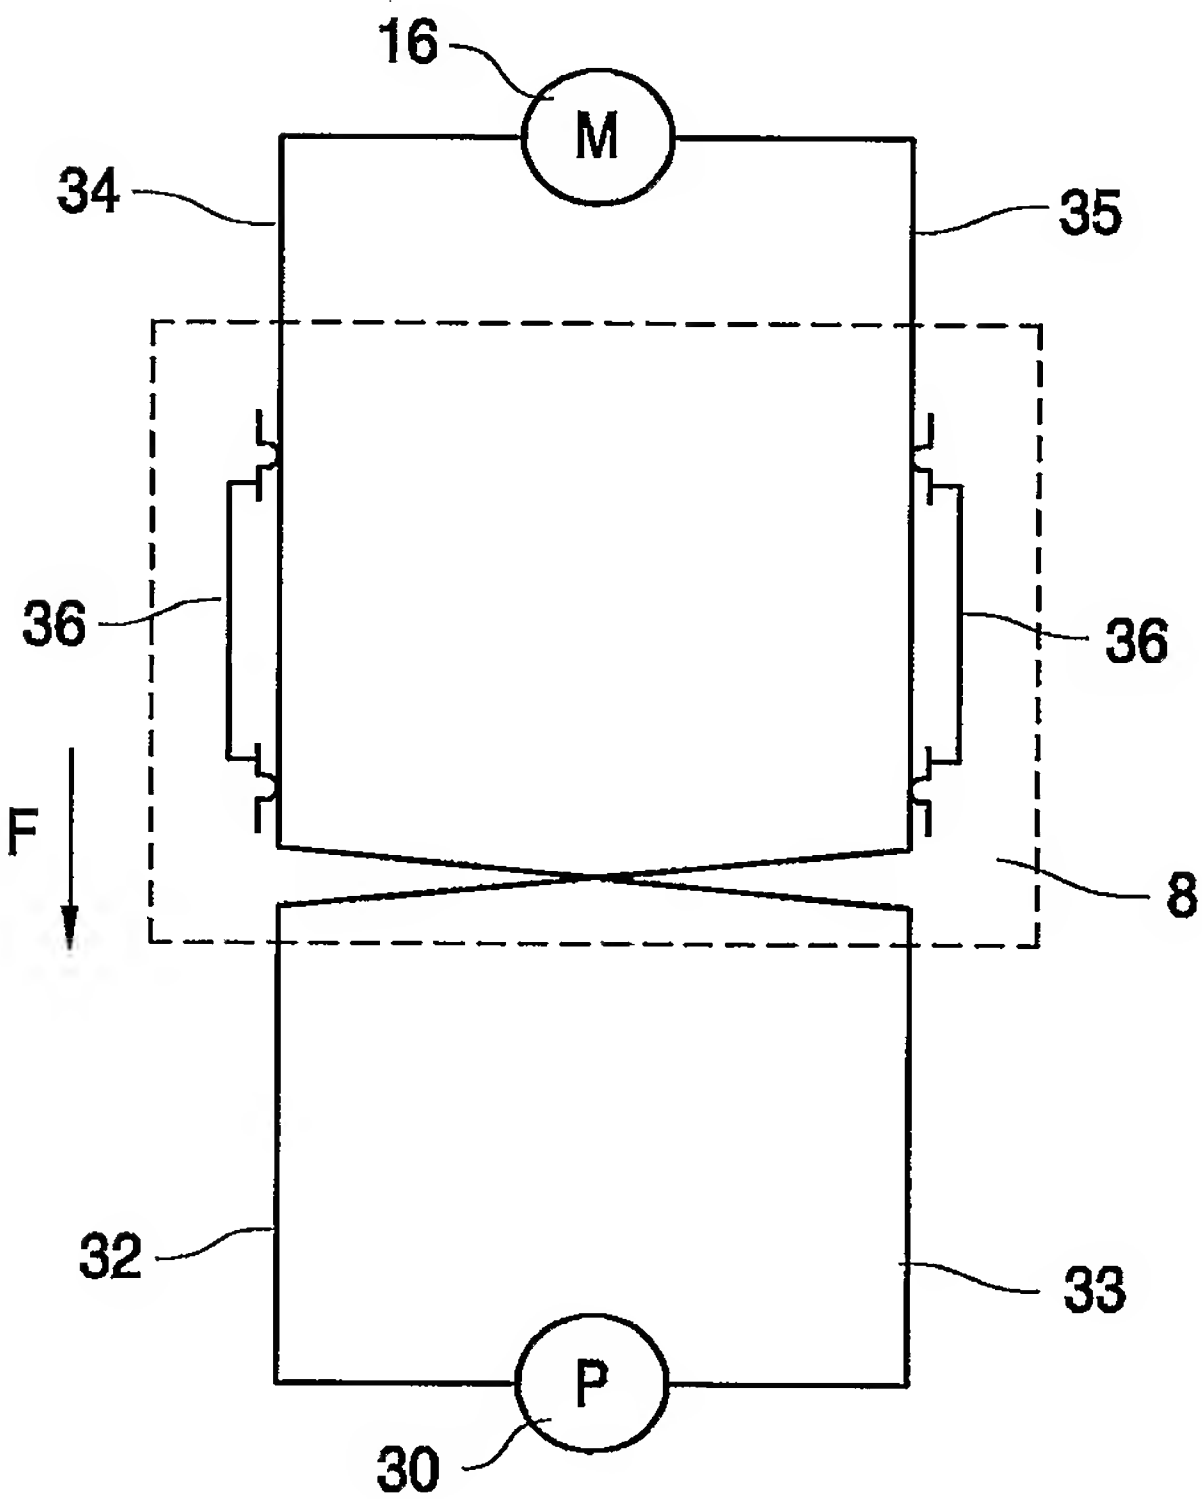


FIG. 5b

PCT/IB2004/051236

